



County of Yuba

Encroachment Permit

Permit #: ENCR-23-0295

Parcel #: 054170015000

Issued Date:

Project Address:

Project:

Owner: Flock Safety
Address: 1170 Howell Mill Road #210 #210
Atlanta, GA 30318
Phone: (714) 865-4101

Contractor:
Address:
Phone:

Project Details

SQ Ft: 4 Valuation: \$12,000.00

Description: Installation of 4 solar powered automatic license plate reading cameras on new 12' aluminum poles for use by Yuba County Water Agency.

Construction Req:
Trench Requirements No. 300/300A

- Schedule a pre-construction meeting with Public Works Inspection prior to beginning construction.
- Traffic control to conform with current CA Manual of Uniform Traffic Control Devices

Applicant shall notify Underground Service alert at least 48 hours prior to excavation by calling 1 (800) 227-2600.

All construction materials and workmanship shall conform to the latest edition of the Yuba County Improvement Standards, the latest edition of the State of California Department of Transportation Standard Specifications, and other agencies' standards as applicable.

Before starting work, the permittee shall notify Yuba County Department of Public Works Inspection, (530)749-5656, two working days in advance of the date work is to begin and prior to final inspection. See General Provisions for delay. Attention is directed to the General Provisions and to any specific conditions attached hereto and made a part hereof.

All work shall be conducted and completed to the satisfaction of Public Works Representatives.

Work conducted under this encroachment permit shall be conducted in compliance with all applicable requirements of the National Pollutant Discharge Elimination System (NPDES), to govern the discharge of storm water and non-storm water from its properties. Work shall also be in compliance with all other applicable Federal, State and Local Laws and regulations. If this permit is in conjunction with a building permit, all work required by this permit must be completed and approved by Yuba County Department of Public Works Inspection before a Building Department Final is Scheduled.

Issued By: Vanessa Solorio Date: 08/10/2023 Final Approval: _____ Date: _____

Upon Signature,

Applicant and/or Owner agrees to abide by the conditions of this permit, its provisions and gives County personnel the authority to inspect all on-site improvements, including improvements outside the County right of way. Applicant also agrees to save and hold harmless the County and each and every officer and employee thereof from any liability or responsibility for any accident, loss or damage to persons or property arising out of or connected in any way with any work done by the applicant under any permit granted hereunder. Applicant also acknowledges that the permit will expire within 18 months if construction has not been completed and no extension has been requested.

Signature  Date 8/10/2023

Permit Fees

Name	Amount	Paid	Due
CDSA Support & Technology Surcharge	\$21.98	\$21.98	\$0.00
Public Works Annual Utility Encroachment Permit	\$314.00	\$314.00	\$0.00
Improvement Construction Inspection	\$628.00	\$628.00	\$0.00

Totals:

\$963.98

\$963.98

\$0.00


Contractor

8/10/2023
Date

Owner

Date

**Know what's below.
Call before you dig.**

811

Now there's a new, national number that will connect you to your local One-Call Center. Before you dig, simply call 811. Or call 1-800-227-2600 to connect directly to USA North, the One-Call Center proudly serving Central and Northern California and all of Nevada.

1-800-227-2600

Call two working days before you dig

It's the law and it's FREE

Whether you're a homeowner or professional excavator, if you're going to dig you must call USA North – the one call center serving Northern and Central California and Nevada. Excavations in California and Nevada require a full two (2) working day notice. In addition to your personal safety and the safety of others, calling before you dig is about protecting the vital buried facilities that supply electric, gas, water, cable and more to our homes, schools, facilities and businesses. Remember, it's the law and it's free.



**Let's all do our part to protect our vital buried facilities.
Please take a flyer and color code booklet with you.**

For more information, visit USA North online at www.usanorth.org

Dig | Safely.

5 STEPS TO A SAFE EXCAVATION

1. Survey & Mark

Survey your proposed excavation site. Make a list of affected owner/operators of underground facilities (owner/operators) at your job site, their needs and requirements. Mark the excavation site on paved surfaces with white spray chalk paint; use flags, stakes, whiskers, etc. on unpaved surfaces. (Homeowners can use flour).

2. Call Before You Dig

Call USA North 2 working days before you dig in California and Nevada. Only owner/operators who are members of the USA North program will be notified. USA North accepts design stage requests through its Internet access only, call 925-798-9504 ext 0 for more information. Emergency calls are not accepted in California. In case of a life-threatening situation, call 911 or your local fire department. Compare your list of affected owner/operators determined in Step 1, with the list of owner/ operators notified by USA North. For your safety, contact any owner/operator at your job site that is not a member of USA North.

3. Wait The Required Time

The 2 working day notice in CA & NV allows USA North members to examine their underground facility records and respond to you. Our members, who are owner/operators of underground facilities, will provide you information about the location of their facility, mark, or stake the horizontal path of their facility with the appropriate color code, or advise of clearance. Depending on our member's workload, they may contact you to try to negotiate a new start time for your excavation. This will allow them the opportunity to provide you with greater service.

4. Respect The Marks

Preserve facility marks for the duration of the job. If any of the owner/operator markings are not reasonably visible, you must call USA North and request re-marking by the affected owner/operator(s). A re-mark request requires a 2 working day notice in CA & NV. When you request a owner/operator(s) to re-mark their facilities, you will be asked if your excavation site is still outlined in white spray chalk, so the USA North members can respond to your request. Your ticket is active for 28 calendar days in CA and 14 calendar days in NV from the date of your call to USA North. You must have an active USA North ticket for the entire duration of your excavation.

5. Dig With Care

In California hand excavate within 24" of the outside diameter of the facility – in Nevada, 30". Facilities that are in conflict with your excavation are to be located by hand and protected before power equipment is used. Notify the affected utility of any contact, scrape, dent, nick or damage to their facility.

Refer to California Government Code 4216 and Nevada Regulatory Statute 455.080 - 455.180 for liability risks. There are fines of up to \$50K and \$100K respectively for violations of these state laws.

USA NORTH


4090 Nelson Avenue, Suite A • Concord, CA 94520-1232

Call 6:00 A.M. - 7:00 P.M. (PT) • Monday - Friday


Dig | Safely.

www.usanorth.org

TRENCH REQUIREMENTS IN EXISTING PAVED AREAS AND WITHIN 5 FEET OF EXISTING PAVED AREAS

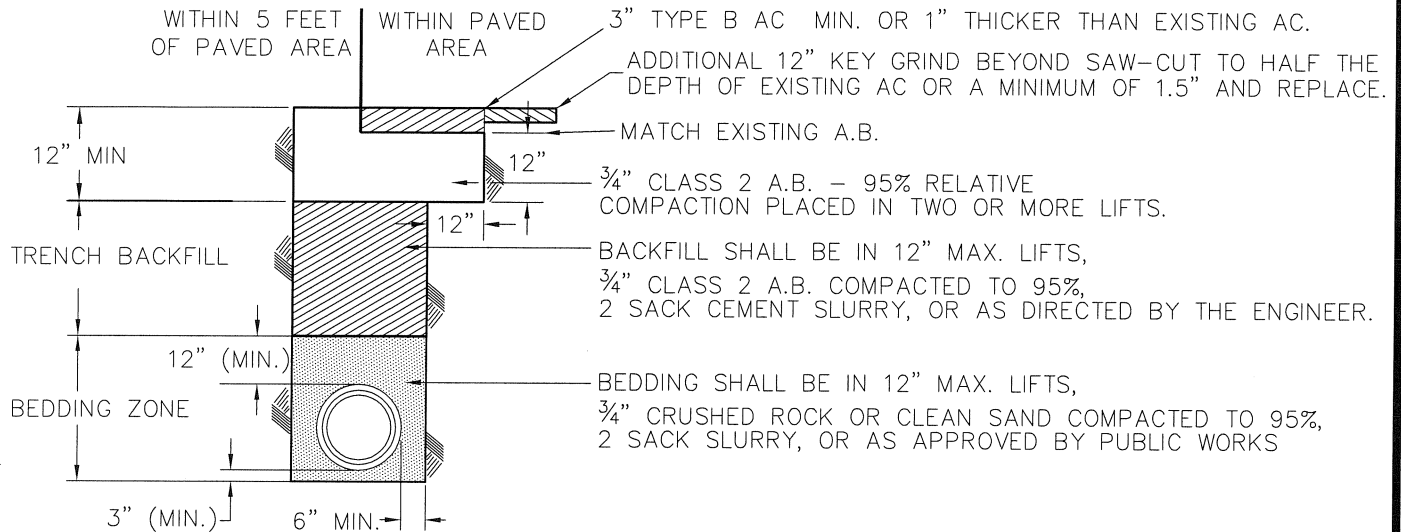

TRENCH REQUIREMENTS FOR NEW ROADWAYS

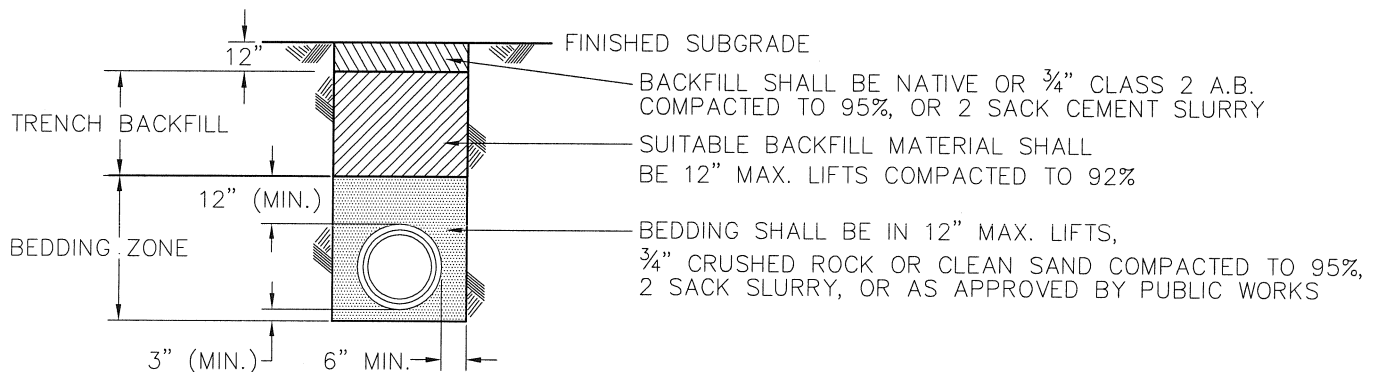

NOTES:

1. ENCROACHMENT PERMIT REQUIRED PRIOR TO CONSTRUCTION IN COUNTY RIGHT OF WAY.
2. CERTIFICATION OF TRENCH BACKFILL COMPACTION IS REQUIRED PRIOR TO PLACING AB ON FINISHED SUBGRADE.
3. SAWCUT INITIAL TRENCH WIDTH, THEN 30 DAYS AFTER WORK HAS BEEN COMPLETED, SAWCUT OR GRIND 12" ON BOTH SIDES OF TRENCH WITH ADDITIONAL 12" KEY GRIND. APPLY TACK COAT PRIOR TO PAVING.
4. ALL TRENCH WORK 5 FEET AND DEEPER SHALL CONFORM TO SECTION 8.4 OF THE YUBA COUNTY STANDARDS AND CAL. OSHA STANDARDS.
5. PLASTIC PIPE INSTALLATION SHALL BE IN ACCORDANCE WITH ASTM 2321.
6. MINIMUM COVER OVER UTILITIES SHALL BE 1' BELOW FINISHED SUBGRADE OR 2' BELOW FINAL GRADE, WHICHEVER IS GREATER.
7. CONTRACTOR SHALL PROVIDE COMPACTION TESTS BY AN INDEPENDENT GEOTECHNICAL FIRM TAKEN 200' APART ON LONGITUDINAL TRENCHES PRIOR TO PLACEMENT OF MATERIAL FOR HIGHER LIFTS. SUBSEQUENT TESTS SHALL BE MIDWAY BETWEEN PREVIOUS TEST SITES. MINIMUM OF 2 TESTS PER LIFT ON CROSS TRENCHES. THE TOP 1' OF SUBGRADE FOR ALL TRENCHES SHALL BE TESTED FOR COMPACTION REQUIREMENT IN ADDITION TO THE RANDOM SUBGRADE TEST SITES.
8. CONTRACTOR SHALL REMOVE MATERIAL NOT MEETING COMPACTION REQUIREMENTS AND HAVE A GEOTECH ENGINEER PROVIDE RECOMMENDATION ON AN ALTERNATIVE BACKFILL TO BE APPROVED BY PUBLIC WORKS.
9. TRENCH REQUIREMENTS SHALL CONFORM TO THE MOST STRINGENT STANDARDS OF EITHER THE COUNTY OR UTILITY COMPANY.

YUBA COUNTY
DEPARTMENT OF PUBLIC WORKS


TRENCH DETAILS

APPROVED BY: 

8-29-06
DATE:


300

TRENCH REQUIREMENTS IN EXISTING PAVED AREAS AND WITHIN 5 FEET OF EXISTING PAVED AREAS

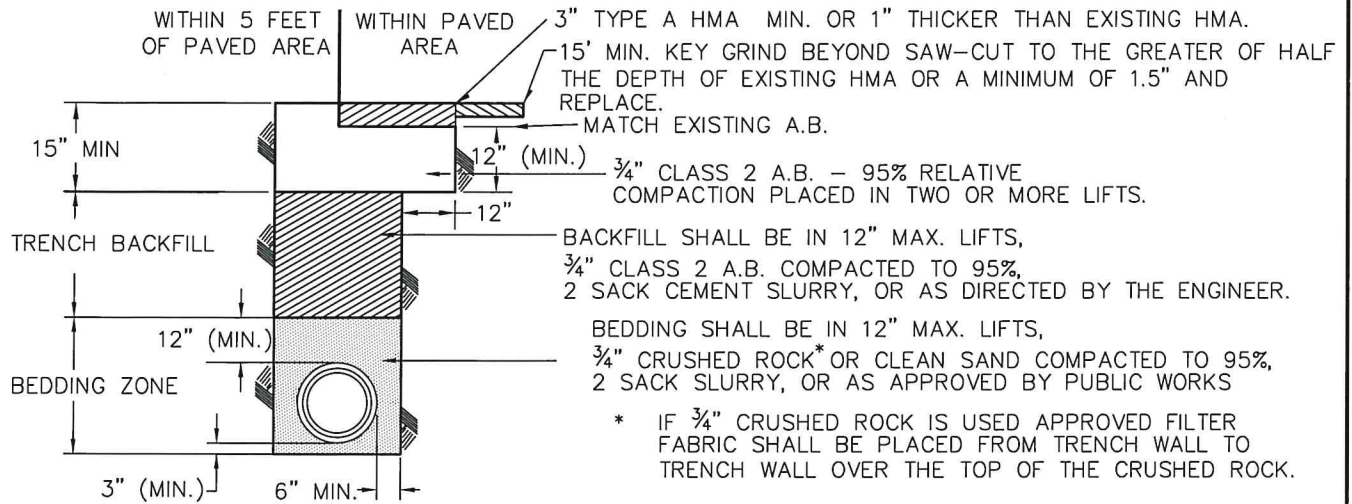

PLAN VIEW

N.T.S.

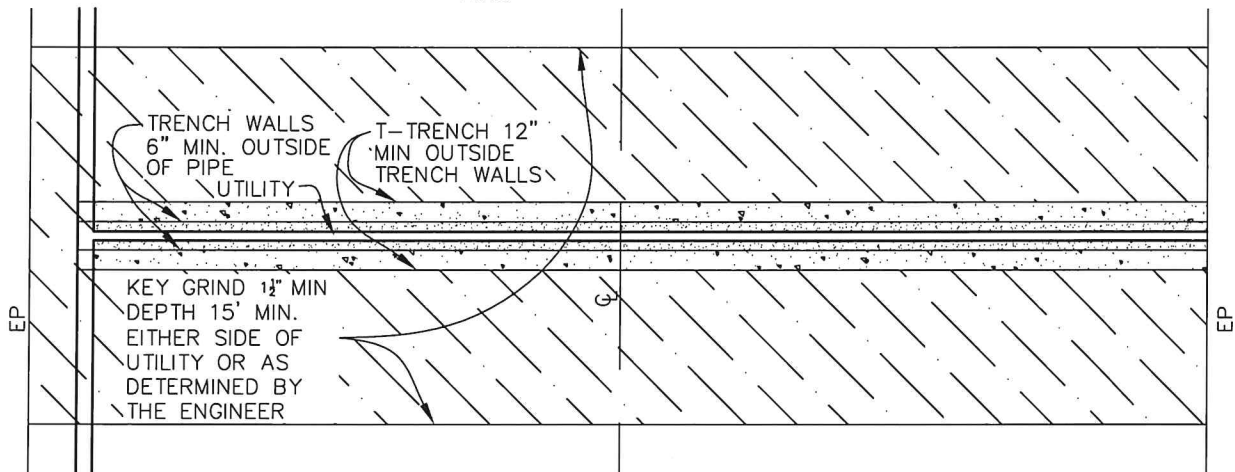

NOTES:

1. THIS DETAIL SHALL APPLY WHEN THE ASPHALT SURFACE IS LESS THAN 3 YEARS OLD, OR AS DIRECTED BY THE ENGINEER.
2. ENCROACHMENT PERMIT REQUIRED PRIOR TO CONSTRUCTION IN COUNTY RIGHT OF WAY.
3. CERTIFICATION OF TRENCH BACKFILL COMPACTION IS REQUIRED PRIOR TO PLACING AB ON FINISHED SUBGRADE.
4. SAWCUT INITIAL TRENCH WIDTH, THEN 30 DAYS AFTER WORK HAS BEEN COMPLETED, SAWCUT OR GRIND 12" ADDITIONAL ON BOTH SIDES OF TRENCH, THEN A MINIMUM KEY GRIND (1.5" MIN. DEPTH) OF 15'. APPLY TACK COAT PRIOR TO PAVING.
5. ALL TRENCH WORK 5 FEET AND DEEPER SHALL CONFORM TO SECTION 8.4 OF THE YUBA COUNTY STANDARDS AND CAL. OSHA STANDARDS.
6. PLASTIC PIPE INSTALLATION SHALL BE IN ACCORDANCE WITH ASTM 2321.
7. MINIMUM COVER OVER UTILITIES SHALL BE 1' BELOW FINISHED SUBGRADE OR 2' BELOW FINAL GRADE, WHICHEVER IS GREATER.
8. CONTRACTOR SHALL PROVIDE COMPACTION TESTS BY AN INDEPENDENT GEOTECHNICAL FIRM TAKEN 200' APART ON LONGITUDINAL TRENCHES PRIOR TO PLACEMENT OF MATERIAL FOR HIGHER LIFTS. SUBSEQUENT TESTS SHALL BE MIDWAY BETWEEN PREVIOUS TEST SITES. MINIMUM OF 2 TESTS PER LIFT ON CROSS TRENCHES. THE TOP 1' OF SUBGRADE FOR ALL TRENCHES SHALL BE TESTED FOR COMPACTION REQUIREMENT IN ADDITION TO THE RANDOM SUBGRADE TEST SITES.
9. CONTRACTOR SHALL REMOVE MATERIAL NOT MEETING COMPACTION REQUIREMENTS AND HAVE A GEOTECHNICAL ENGINEER PROVIDE RECOMMENDATION ON AN ALTERNATIVE BACKFILL TO BE APPROVED BY PUBLIC WORKS.
10. TRENCH REQUIREMENTS SHALL CONFORM TO THE MOST STRINGENT STANDARDS OF EITHER THE COUNTY OR UTILITY COMPANY.

YUBA COUNTY
DEPARTMENT OF PUBLIC WORKS

UTILITY
TRENCH DETAILS

APPROVED BY:

DATE:

11/5/2000A

**DRIVEWAY/ENCROACHMENT
PERMIT APPLICATION**

YUBA COUNTY DEPARTMENT OF PUBLIC WORKS
915 8th Street, Suite 125
Marysville, CA 95901
PHONE: (530) 749-5420 FAX: (530) 749-5424
Email: publicworks@co.yuba.ca.us

4 Public Right-of-Way locations Located _____ North Of _____
(Site Address) (Intersecting Road or Landmark)

APN: 054170015000

Owner: Yuba County Right-of-Way

Address: _____

Phone: _____

Email: _____

Applicant Name: Flock Safety on behalf of Yuba County Water Agency

Applicant Address: 1170 Howell Mill Rd NW #210
Atlanta, GA 30318

Phone: 714-865-4101

Email: derek.porcella@flocksafety.com

General Contractor: Flock Safety (CL:1086983)

Address: 1170 Howell Mill Rd NW #210
Atlanta, GA 30318

Phone: 470-833-8280

Email: tyler.webb@flocksafety.com

Sub-Contractor: _____

Address: _____

Phone: _____

Email: _____

List any additional sub-contractors on a separate sheet

Application is made for permission to excavate, construct and/or otherwise encroach on county right of way by performing the work described below:

1. Description of Work:

Installation of 4 solar powered automatic license plate reading cameras on new 12' aluminum poles for use by Yuba County Water Agency.

2. Estimated cost of work in right of way: \$12,000.00

3. Attach 3 sets of plans (show location, dimensions, etc. Include all pertinent information).

4. Submit traffic control plan if applicable.

5. Submit work schedule (include hours, days and what will take place each day).

Upon Signature,

Applicant agrees to abide by the conditions of this permit and its provisions. Applicant also acknowledges that the permit will expire within one year if construction has not been completed and no extension has been requested.

Signature: 

Date: 8/10/2023

LICENSE PLATE READER CAMERA INSTALLATION

CASE NUMBER: 00363949

PERMITTING JURISDICTION:

YUBA COUNTY

STATE OF CA
YUBA COUNTY
ON BEHALF OF

YUBA COUNTY WATER AGENCY

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA
95901

flock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HEARBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER
MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER
UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION

CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET:	REV:
T.01	0

CONTACT LIST

PERMITTING

DEREK PORCELLA
DEREK.PORCELLA@FLOCKSAFETY.COM

PROJECT MANAGER

MELISSA BARKER-SOLSBERY
MELISSA.BARKER-SOLSBERY
@FLOCKSAFETY.COM


SEE APPROVED PERMIT FOR LISTED INSPECTOR*

DRAWING INDEX

T.01	COVER SHEET & LOCATION MAPS
T.02	SYMBOLGY & ABBREVIATIONS
GN.01 - GN.02	GENERAL NOTES
A.01 - A.04	PLAN DRAWINGS
SPEC.01 - SPEC.02	EQUIPMENT & FOUNDATION DETAILS



Know what's below.
Call before you dig.

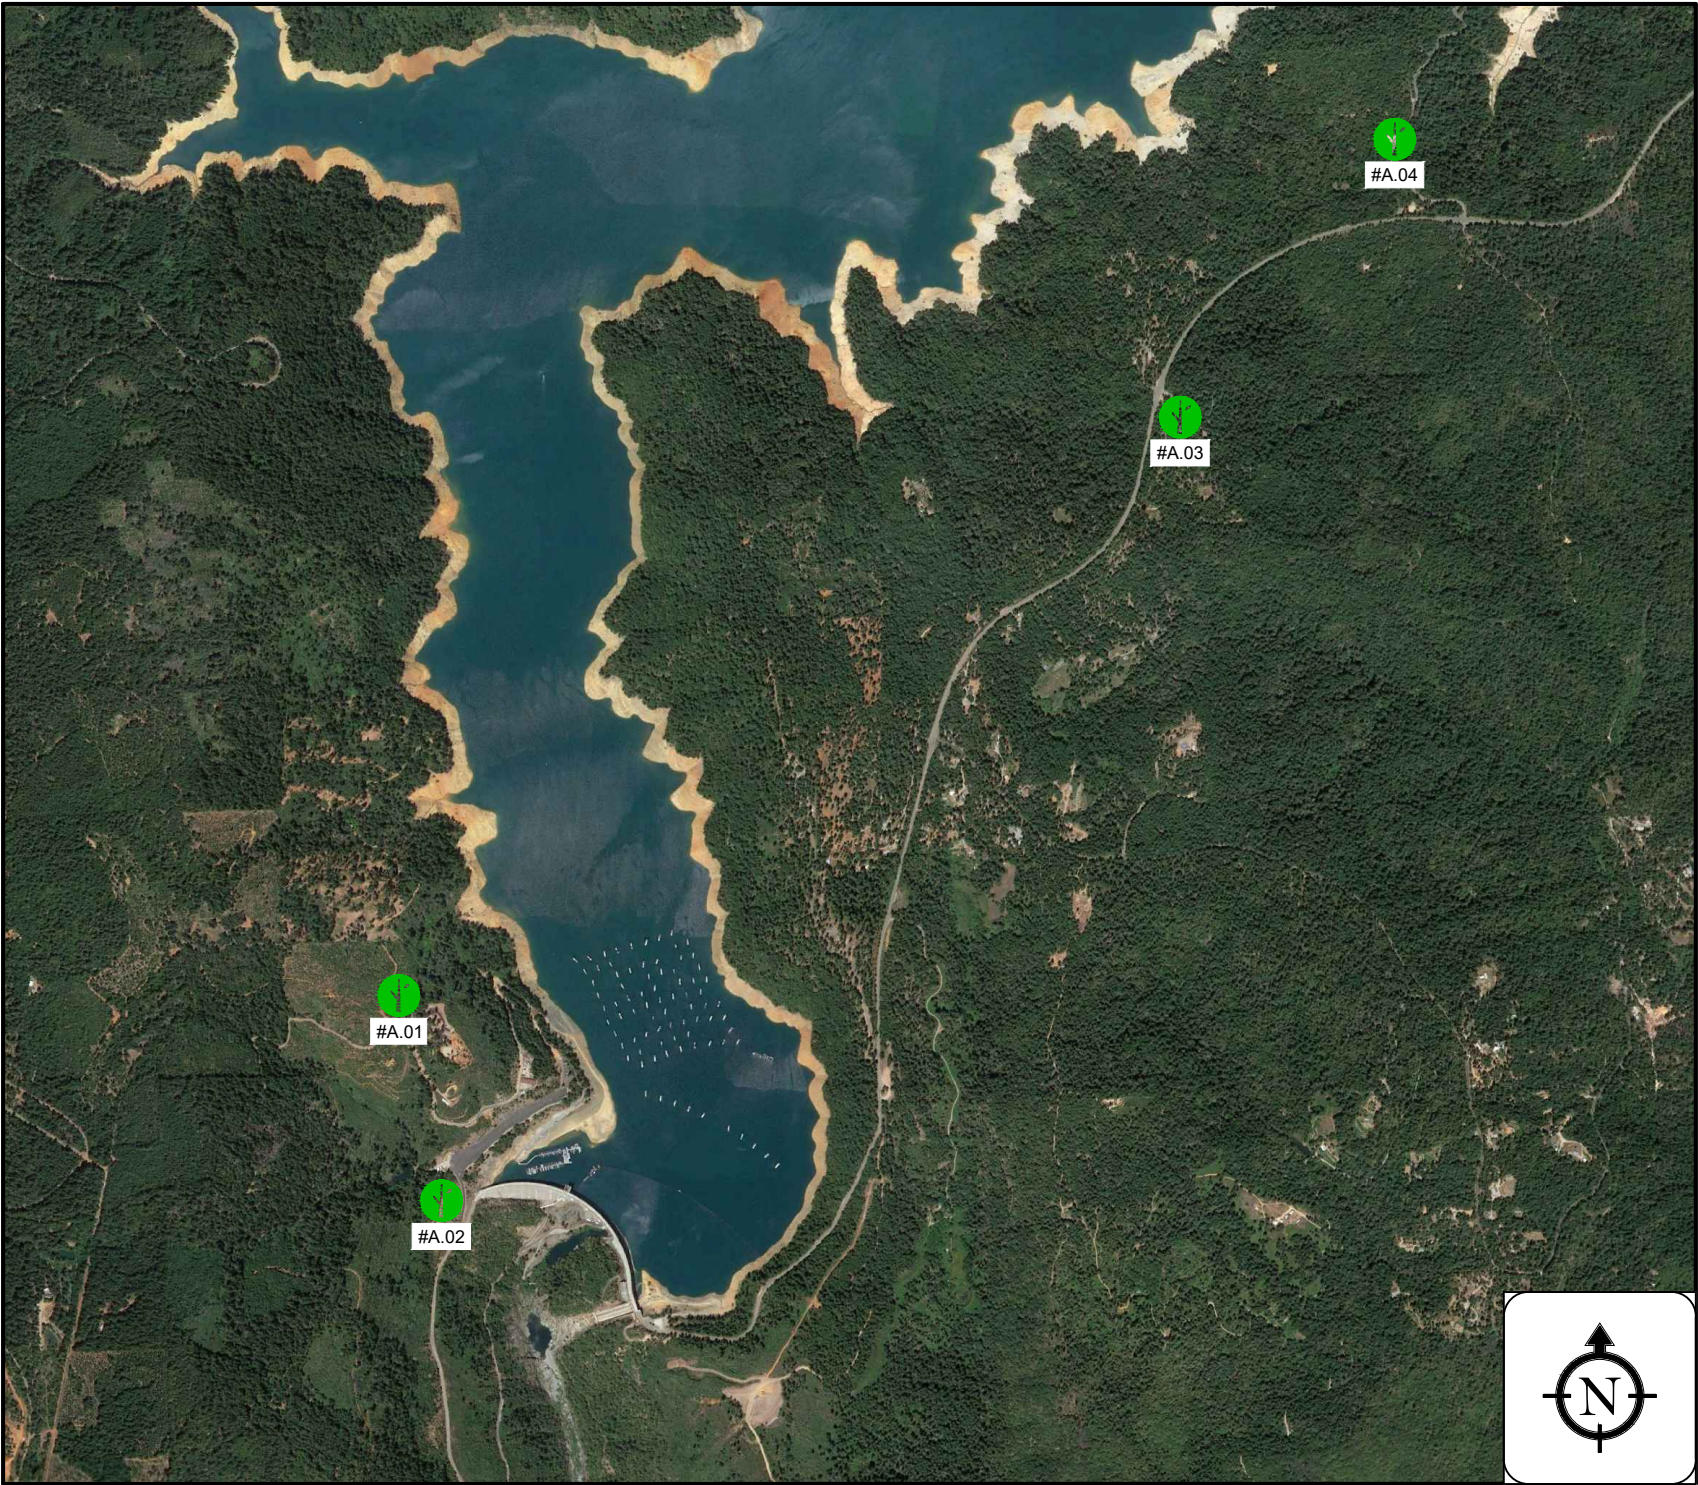

LINETYPES

	R/W	RIGHT OF WAY
	EOP	EDGE OF PAVEMENT
	SW	SIDEWALK
	C/L	CENTERLINE
	GAS	GAS
	WTR	WATER
	COMM	TELEPHONE
	ELEC	ELECTRIC
	SEW	SANITARY SEWER (SEW)
	SD	STORM DRAIN
		FENCE
	TV	CABLE TV
	STM	STEAM
	OIL	OIL
	UNK	UNKNOWN UTILITY
		RAILROAD

SYMBOLOLOGY

	CAMERA - EXISTING
	CAMERA - PROPOSED
	AUDIO DETECTION - EXISTING
	AUDIO DETECTION - PROPOSED
	POLE - PROPOSED
	POLE - EXISTING
	HANDHOLE - EXISTING
	HANDHOLE - PROPOSED
	PEDESTAL - EXISTING
	MANHOLE - EXISTING
	POINT OF INTEREST
	ACCESS POINT
	CULVERT - EXISTING
	FIRE HYDRANT - EXISTING
	WATER MAIN - EXISTING
	WATER VALVE - EXISTING
	GAS VALVE - EXISTING
	DOWN GUY AND ANCHOR
	OVERHEAD GUY
	BORING REQUIRED
	UG CONDUIT - EXISTING

ABBREVIATIONS:

ABAND	Abandoned	MAX	Maximum
APPROX	Approximate	MB	Mailbox
ASPH	Asphalt	MH	Manhole
BLDG	Building	MIN	Minimum
CL	Centerline	MIT	Mitigation
CMP	Corrugated Metal Pipe	MKR	Marker
CO	County	MMV	Meet Me Vault
CONC	Concrete	MON	Monument
CSG	Casing	MOT	Maintenance of Traffic
CT	Count	NO	Number
CULV	Culvert	OC	Open Cut
DB	Directional Bore	PRK MTR	Parking Meter
DBH	Diameter at Breast Height	P/L	Property Line
D.D.	Down Drain	PED	Pedestal
DEPT	Department	PI	Point of Inflection
DIA	Diameter	PKG	Package
DIR	Directional	PVC	Polyvinyl Chloride
DIST	District	RCB	Reinforced Concrete Box
DOC	Depth of Cover	RCP	Reinforced Concrete Pipe
DOT	Department of Transportation	RD MEM	Roadside Memorial
DWG	Drawing	REQD	Required
DWY	Driveway	RGS	Rigid Galvanized Steel
E MH	Electric Manhole	ROW	Right of Way
E MKR	Electric Line Marker	RR	Railroad
E PED	Electric Pedestal	SCB	Sprinkler Control Box
E VLT	Electric Vault	SD	Storm Drain/Curb Inlet
EM	Electric Meter	SDMH	Storm Water Manhole
ENC	Encased	SEC.	Section
ENG	Engineering	SF	Silt Fence
EOP	Edge of Pavement	SMH	Sanitary Sewer Manhole
EPB	Electric Pull Box	SPL	Splice
EXIST	Existing	SS CO	Sanitary Sewer Clean Out
FDH	Fiber Distribution Hub	SS LIFT	Sanitary Sewer Lift Station
FDT	Fiber Distribution Terminal	STA.	Station
FH	Fire Hydrant	STD	Standard
FO	Fiber Optic	STR	Section Township Range
FO MH	Fiber Optic Manhole	SWPPP	Storm Water Pollution Prevention Plan
FO MKR	Fiber Optic Line Marker	T HH	Telecom Handhole
FO VLT	Fiber Optic Vault	T MH	Telecom Manhole
FOC	Face of Curb	T MKR	Telecom Line Marker
FS	Filter Sock	T PED	Telecom Pedestal
G MH	Gas Manhole	T VLT	Telecom Access Vault
G MKR	Gas Line Marker	T.P.	Trench Plug
G SD	Grated Storm Drain	TCB	Traffic Control Box
GALV	Galvanized	TCE	Temporary Construction Easement
GEO SRV MKR	Geodetic Survey Marker	TCV	Traffic Control Vault
GM	Gas Meter	TRF MH	Traffic Control Manhole
GV	Gas Valve	TSP	Traffic Signal Light
GWMW	Groundwater Monitoring Well	TYP	Typical
HDPE	High Density Polyethylene	UG	Underground
HH	Handhole	UNK MH	Unknown Manhole
HWY	Highway	UNK PED	Unknown Pedestal
I.P.	Inlet Protection	UNK UTL MKR	Unknown Utility Marker
ILA	In Line Amplifier	UNK VLT	Unknown Vault
INC	Incorporated	UTL LP	Utility Light Pole
INT	Intermediate	UTL P	Utility Pole
L/A ROW	Limited Access Right of Way	VLT	Vault
LF	Linear Feet	VP	Gas Vent Pipe
LOC MKR	Locating Marker	W MH	Water Manhole
LP	Light Pole	W MKR	Water Line Marker
		W SPG	Water Spigot
		W VLT	Water Vault
		WM	Water Meter
		WV	Water Valve

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA
95901

frock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HERBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION

CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET:
T.02

REV:
0

GENERAL & CONSTRUCTION NOTES

1. FLOCK SAFETY SHALL BE RESPONSIBLE FOR LOCATING ALL UNDERGROUND UTILITIES 48 PRIOR TO CONSTRUCTION.
2. CONTRACTOR SHALL BE RESPONSIBLE TO APPLY AND OBTAIN AN APPROVED TRAFFIC CONTROL PLAN IN ACCORDANCE WITH MUTCD AND LOCAL STANDARDS AS REQUIRED.
3. CONTRACTOR SHALL BE RESPONSIBLE TO RESTORE ALL DISTURBED AREAS TO ORIGINAL CONDITION TO STATE DEPARTMENT OF TRANSPORTATION AND LOCAL AGENCY SATISFACTION AT NO ADDITIONAL COMPENSATION.
4. ALL WORK SHALL CONFORM TO ALL APPLICABLE ELECTRICAL CODES EXCEPT WHEN SATE DEPARTMENT OF TRANSPORTATION AND LOCAL AGENCY STANDARDS SUPERSEDE.
5. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH STATE AND LOCAL AGENCY SPECIFICATIONS UNLESS SPECIFICALLY STATED OR SHOWN OTHERWISE HEREIN.
6. THE WORK INVOLVING INSTALLATION OF FLOCK SAFETY ALPR CAMERAS INVOLVING TEMPORARY LANE CLOSURES ARE TO BE DONE BETWEEN THE HOURS OF 8:00AM AND 5:00PM. MONDAY THROUGH FRIDAY UNLESS OTHERWISE STATED BY THE DEPARTMENT.
7. WHEN INSTALLING FLOCK SAFETY PROVIDED POLES, A MINIMUM OF 2’ SEPARATION SHALL BE MAINTAINED FROM ALL EXISTING UTILITIES AND STORM DRAIN STRUCTURES.
8. IF THE PROPOSED UTILITY CANNOT BE INSTALLED PER THE APPROVED PERMITTED PLAN AND BY GENERAL SPECIFICATIONS, A REVISED PLAN MUST BE PROVIDED TO THE DEPARTMENT FOR REVIEW AND APPROVAL PRIOR TO THE INSTALLATION OF PRODUCTS OR MATERIALS AT THE GIVEN LOCATIONS WHERE CONFLICTS OCCUR.
9. NO PEDESTRIAN PATHWAY IS TO BE REMOVED, BLOCKED, OR DISTURBED WITHOUT HAVING A SUFFICIENT DESIGNATED TEMPORARY PEDESTRIAN PATHWAY WITH ALL APPROPRIATE PEDESTRIAN MAINTENANCE OF TRAFFIC SIGNS IN PLACE PRIOR TO PATHWAY BEING AFFECTED.
10. ALL TEMPORARY PEDESTRIAN PATHWAYS MUST BE FIRM AND UNYIELDING.
11. ANY SIDEWALK DISTURBED WILL BE REPLACED BY SECTION WITHIN 72 HOURS TO GENERAL SPECIFICATIONS.
12. THE GENERAL RETAINS THE RIGHT TO MAKE ALTERATIONS TO THE PERMIT, ATTACHED SKETCH OR CHARACTER OF WORK AS MAY BE CONSIDERED NECESSARY OR DESIRABLE DURING THE PROGRESS OF THE WORK FOR SATISFACTORY COMPLETION OF THE PROPOSED CONSTRUCTION.
13. THE PERMITTEE SHALL NOTIFY THE GENERAL OF DATE OF COMPLETION, REQUEST A FINAL INSPECTION AND A NOTICE OF FINAL ACCEPTANCE.
14. ALL CONSTRUCTION AND/OR MAINTENANCE ON THE GENERAL RIGHT OF WAY SHALL CONFORM TO THE FEDERAL MANUAL ON UNIFORM TRAFFIC DEVICES, THE GENERAL ROADWAY AND TRAFFIC DESIGN STANDARD SPECIFICATIONS FOR ROAD AND BRIDGE CONSTRUCTION, PLANS PREPARATION MANUAL AND DRAINAGE MANUAL.
15. ANY SIDEWALK DAMAGED AS A RESULT OF WORK BEING PERFORMED IN ASSOCIATION WITH THE PERMITTEE AND CONTRACTOR SHALL BE REMOVED AND REPLACED.
16. THE CONTRACTOR SHALL HAVE AN AUTHORIZED PERSON AVAILABLE AT/OR NEAR THE WORK SITE ON A 24 HOUR BASIS, 7 DAYS A WEEK IN ORDER TO ADDRESS EMERGENCY ISSUES ASSOCIATED WITH THE PROJECT.
17. NO STOCKPILING, STORING OR SEMI PERMANENT USE OF THE RIGHT OF WAY IS AUTHORIZED UNLESS SPECIFICALLY IDENTIFIED WITHIN THE PERMIT.
18. NO WORK SHALL BE PERFORMED DURING ANY STATE OR FEDERAL HOLIDAYS UNLESS OTHERWISE APPROVED BY THE GENERAL.
19. THE PERMITTED WORK SCHEDULE IS DEFINED AS MONDAY THROUGH FRIDAY 8:00AM TO 5:00PM UNLESS OTHERWISE NOTED WITHIN THE PERMIT. ANY WORK DESIRED OUTSIDE OF THIS PERIOD MUST BE REQUESTED IN ADVANCE AND APPROVED BEFORE WORKING THE ALTERNATE SCHEDULE.
20. THE DEPARTMENT RESERVES THE RIGHT TO MAKE ADJUSTMENTS TO ANY PERMITTED METHODS OF INSTALLATION, SCOPE OF WORK AND RESTORATION THAT MAY BE REQUIRED TO POSITIVELY SUPPORT LIFE, SAFETY AND ENVIRONMENTAL WELL BEING OF ALL USERS OF THE TRANSPORTATION SYSTEM.
21. PERMITTEE SHALL NOT BEGIN ANY WORK ALONG GENERAL RIGHT-OF-WAY UNTIL THE INPECTION OF THE PERMIT ARE MET.
22. PRIOR TO CLOSING A LANE, THE PERMITTEE SHALL PROVIDE A SUTIABLE TRAFFIC CONTROL PLAN AS PER FEDERAL MANUAL TRAFFIC CONTROL STANDARDS DEPICTING ALL WORK BEING DONE. THE UTILITY OWNER IS NOT REQUIRED TO REPORT LANE CLOSURES FOR EMERGENCIES.
23. IT WILL BE THE RESPONSIBILITY OF THE PERMITTEE TO REPAIR ANY DAMAGE TO GENERAL FACILITIES AND/OR PRIVATE PROPERTY CAUSED BY CONSTRUCTION OF THE PROJECT.

DESIGN NOTES:

1. POLE AND FOUNDATION DESIGNED PER CURRENT STANDARD SPECIFICATIONS FOR STRUCTURAL SUPPORT FOR HIGHWAY SIGNS, LUMINAIRES AND TRAFFIC SIGNALS.
2. POLE DESIGN WIND SPEED IS 85 MPH, 110 MPH, 130 MPH, AND 150 MPH BASED ON A 300-YEAR MRI.
3. CONCRETE SHALL HAVE A MINIMUM 28-DAY DESIGN STRENGTH OF 3000 PSI, AND HAVE AT LEAST 505 POUNDS OF CEMENTITIOUS MATERIAL PER CUBIC YARD.
4. PROVIDE A FLAT BEARING SURFACE ON TOP SURFACE ON TOP SHAFT BELOW THE POLE BASE. SLOPE TOP SURFACE OF CONCRETE SHAFT OUTSIDE OF POLE BASE TO DRAIN AWAY FROM POLE.
5. DO NOT USE THIS DETAIL FOR SITES WHERE SOIL CONSISTS OF SOFT CLAY, PEAT OR ANY OTHER SOIL WHERE A SMALL DIAMETER REBAR (#5 OR SMALLER) OR METAL PROBE PENETRATES EASILY TO 6" OR MORE OF DEPTH WHEN THE FULL WEIGHT OF A PERSON IS APPLIED.

ADA COMPLIANCE NOTES:

1. ALL SIDEWALK CONSTRUCTION SHALL BE IN ACCORDANCE WITH ADA TITLE II AND ALL FEDERAL, STATE, AND LOCAL STANDARDS.
2. USE STANDARD WATCH MANUAL PLANS FOR PEDESTRIAN CONTROL PLANS FOR CLOSURE OF SIDEWALK.
3. MINIMUM SIDEWALK CLEAR PEDESTRIAN ACCESS ROUTE (PAR) IS 48" WIDE.
4. NO OBSTRUCTION IS PERMITTED ALONG THE WIDTH OF THE SIDEWALK UP TO 7'-0" IN HEIGHT.

COUNTY NOTES:

1. CURRENT A.D.A. STANDARDS SHALL BE UPHELD AT ALL TIMES.
2. CONTRACTOR SHALL MAINTAIN ACCESS TO ALL ADJACENT PROPERTY IN THE VICINITY OF THE CONSTRUCTION.
3. CONTRACTOR SHALL PROVIDE SAFE ACCESS PER CURRENT GENERAL STANDARDS FOR ALL PEDESTRIAN TRAFFIC REGULATIONS ON ALL EXCAVATIONS OPENED IN THE TRAFFIC ZONE CONTROL AREA.
4. CONTRACTOR SHALL RESTORE RIGHT-OF-WAY TO EQUAL OR BETTER CONDITION UPON COMPLETION OF WORK.

GENERAL NOTES:

1. ALL WORK PERFORMED WITHIN THE GENERAL RIGHT-OF-WAY SHALL BE IN ACCORDANCE WITH THE CURRENT GENERAL STANDARDS.
2. SHOULD A CONFLICT ARISE BETWEEN THE DETAILS SHOWN IN THE PLANS AND THE DEPARTMENT OF TRANSPORTATION STANDARDS, THE ENGINEER/PERMITTEE SHALL IMMEDIATELY CONFER WITH THE TRANSPORTATION STANDARDS. THE ENGINEER/PERMITTEE SHALL IMMEDIATELY CONFER WITH THE DEPARTMENT’S ENGINEER IN ORDER TO RESOLVE THE DISCREPANCY. IN NO CASE WILL ANYTHING LESS THAN THE DEPARTMENTS MINIMUM STANDARDS BE ALLOWED.
3. ALL TRAFFIC STRIPING AND MARKINGS ARE TO BE LEAD-FREE, NON-SOLVENT BASED THERMOPLASTIC.
4. ALL DISTURBED AREA WITHIN THE RIGHT-OF-WAY WILL BE RESTORED TO ORIGINAL OR BETTER CONDITION BY GRADING AND SODDING IN AREA DISTURBED.
5. BURNING OF ANY MATERIAL OR DEBRIS IS PROHIBITED IN GENERAL RIGHT-OF-WAY.
6. ALL LANES MUST BE OPENED FOR TRAFFIC DURING AN EVACUATION NOTICE OF A CATASTROPHIC EVENT AND SHALL REMAIN OPEN FOR THE DURATION OF THE EVACUATION OR EVENT.
7. THE CONTRACTOR SHALL NOTIFY JURISDICTION PRIOR TO BEGINNING ANY CONSTRUCTION WITHIN GENERAL RIGHT-OF-WAY AS PER ISSUED PERMIT.
8. ALL AREAS WITHIN GENERAL R/W DISTURBED BY CONSTRUCTION SHALL BE RE-GRADED AND SODDED WITH LIKE-KIND SOD WITHIN (7) DAYS.

1.0 SCOPE OF WORK

- 1.1 THIS PROJECT SHALL CONSIST OF THE FOLLOWING OPERATIONS:

THE WORK PACKAGE IS FOR THE INSTALLATION OF FLOCK SAFETY ALPR CAMERAS WHICH INCLUDES BUT IS NOT LIMITED TO: FLOCK SAFETY PROVIDED POLES, POLE MOUNTED SOLAR PANELS, AND EXTERNAL BATTERY PACKAGES.

2.0 DRAWINGS

- 2.1 THE WORK SHALL BE PERFORMED IN STRICT ACCORDANCE WITH THE FOLLOWING ATTACHED DRAWINGS THAT ARE HEREBY MADE A PART OF THE STATEMENT OF WORK, BY THIS REFERENCE.

- 2.2 INSTALLER SHALL RECEIVE FLOCK SAFETY MATERIALS AT A FLOCK SAFETY LEASED WAREHOUSE FACILITY OR AT THE LOCAL TSO LOCATED AT (CONTACT 24 HOURS IN ADVANCE): 1170 HOWELL MILL RD NW, ATLANTA, GA 30318.

ALL UNUSED AND REQUESTED SALVAGED MATERIAL TO BE RETURNED TO SAME ADDRESS.

- 2.3 THE RECEIPT OF ALL MATERIALS SHALL BE CONSTRUED AS CONCLUSIVE EVIDENCE THAT THE INSTALLER HAS MADE ALL NECESSARY EXAMINATION AND INSPECTIONS, AND IS SATISFIED AS TO THE QUALITY AND QUANTITY OF MATERIALS RECEIVED.

- 2.4 ANY AND ALL MATERIALS THAT MAY BECOME LOST, STOLEN OR DAMAGED SHALL BE REPLACED BY THE INSTALLER AT HIS SOLE EXPENSE, AND ANY DELAY INCURRED SHALL NOT BE CAUSE FOR AN EXTENSION IN TIME.

- 2.5 ALL UNUSED MATERIALS SUPPLIED BY FLOCK SAFETY BUT NOT USED IN THE COMPLETION OF WORK SHALL BE RETURNED TO FLOCK SAFETY FOURTEEN (14) DAYS AFTER INSTALL COMPLETION. FLOCK SAFETY WILL ARRANGE FOR THE TRANSPORTATION OF THESE MATERIALS.

3.0 PERMITS

- 3.1 FLOCK SAFETY HAS OBTAINED OR WILL OBTAIN PERMITS FROM DEPARTMENTS AND/OR AGENCIES OF CITIES, COUNTIES, STATES, FEDERAL GOVERNMENT, RAILROAD OR OTHER ENTITIES, WHICH PROVIDE FOR THE PLACING OF PIPES AND/OR CABLE UNDER DITCH, TRACKS AND ROADS AND PLACING PIPES AND/OR CABLE ALONG AND WITHIN PUBLIC OR PRIVATE ROAD RIGHTS OF WAY AND RAILROAD RIGHTS.

- 3.2 CONTRACTOR SHALL OBTAIN ADDITIONAL PERMITS, IF REQUIRED, FOR EQUIPMENT ACCESS OR MOVEMENT ON PUBLIC ROADS AND RAILROADS. COPIES OF SUCH PERMITS SHALL BE FURNISHED TO FLOCK SAFETY.

- 3.3 ALL TRAFFIC CONTROL, IF APPLICABLE, SHALL BE IN ACCORDANCE WITH LOCAL, STATE, COUNTY, OR PERMITTING AGENCY LAWS, REGULATIONS, AND REQUIREMENTS, AND WILL BE THE INSTALLER’S RESPONSIBILITY. TRAFFIC CONTROL PLANS PROVIDED BY CURRENT GENERAL DESIGN STANDARDS.

4.0 SAFETY AND PRECAUTIONS

- 4.1 ALL PERSONNEL ARE REQUIRED TO ABIDE BY ALL RULES AND REGULATIONS SET FORTH IN THE FLOCK SAFETY REQUIREMENTS, RAILROAD SAFETY CODE AND GOVERNING JURISDICTION.

- 4.2 THE WORK UNDER THIS INSTALLATION WILL BE CONSTRUCTED ALONG RIGHTS OF WAY THAT MAY CONTAIN EXISTING AND OPERATIONAL UTILITIES. THE CONTRACTOR SHALL BE FULLY RESPONSIBLE FOR LOCATING EXISTING UTILITIES AND FOR COMPLIANCE WITH THE REQUIREMENTS OF ANY STATEWIDE AND/OR LOCAL AREA IN ADVANCE OF ANY EXCAVATION, BORING OR PLACING WORK AND THE CONTRACTOR SHALL LOCATE AND EXPOSE BY HAND ALL EXISTING SUBSURFACE PLANT. ANY DAMAGE CAUSED BY THE CONTRACTOR SHALL BE REPAIRED BY THE CONTRACTOR AT HIS SOLE EXPENSE AND ANY DELAY INCURRED SHALL NOT BE CAUSE FOR AN EXTENSION IN THE TIME OF THE CONTRACT.

- 4.3 INSTALLER SHALL BE RESPONSIBLE FOR THE PROTECTION AND MAINTENANCE OF PUBLIC AND PRIVATE PROPERTIES. INSTALLER SHALL PROTECT, SHORE, BRACE, SUPPORT AND MAINTAIN ALL UNDERGROUND PIPES, CONDUITS, DRAINS AND OTHER SUBSURFACE STRUCTURES UNCOVERED OR OTHERWISE AFFECTED BY THE WORK.

- 4.4 INSTALLER SHALL BE RESPONSIBLE FOR ALL DAMAGE TO STREETS, ROADS, HIGHWAYS, SHOULDERS, DITCHES, EMBANKMENTS, CULVERTS, BRIDGES OR OTHER PUBLIC OR PRIVATE PROPERTY OR FACILITY, REGARDLESS OF LOCATION OR CHARACTER, WHICH MAY BE CAUSED BY THE WORK, OR BY MOVING, HAULING, OR OTHERWISE TRANSPORTING EQUIPMENT, MATERIALS OR WORKERS TO OR FROM WORK OR ANY SITE THEREOF, WHETHER BY THE CONTRACTOR OR SUBCONTRACTORS.

- 4.5 DURING ALL PHASES OF CONSTRUCTION, THE INSTALLER SHALL MAINTAIN WORK AREAS IN A NEAT AND ORDERLY MANNER. CONSTRUCTION EQUIPMENT, MATERIAL AND SUPPLIES THAT ARE STORED ON THE RIGHT OF WAY SHALL NOT RESTRICT ACCESS TO SUCH RIGHT OF WAY OR THE RIGHT OF WAY ITSELF.

5.0 SECURITY

- 5.1 INSTALLER IS RESPONSIBLE FOR ALL SECURITY REQUIRED TO PROTECT HIS WAREHOUSE, LAYDOWN, AND STAGING AREA AND THE USE OF OUTSIDE PLANT WORK. SECURITY SHALL ALSO INCLUDE TRAFFIC CONTROL WHERE REQUIRED INCLUDING THE USE OF OFF DUTY POLICE OFFICERS.

6.0 STAKING AND SCHEDULING

- 6.1 ALL STAKING WILL BE PROVIDED BY FLOCK SAFETY. REQUIRED RIGHT OF WAY CLEARING SHALL BE COMPLETED PRIOR TO STAKING: THEREFORE, THE INSTALLER SHALL COORDINATE ALL CLEARING AND PLACING OPERATIONS WITH THE FLOCK SAFETY PROJECT SUPERVISOR TO AVOID DELAYS AND INTERFERENCE.

- 6.2 FLOCK SAFETY WILL PROVIDE RAILROAD, FLAGMEN AND SIGNALMEN AS REQUIRED; HOWEVER, THE CONTRACTOR SHALL BE REQUIRED TO COORDINATE ITS NEEDS FOR SUCH SIGNALMEN AND FLAGMEN WITH FLOCK SAFETY.

- 6.3 IN ADDITION TO THE SCHEDULING REQUIREMENTS IN THE GENERAL PROVISIONS, UPON REQUEST THE CONTRACTOR SHALL ALSO SUBMIT TO THE FLOCK SAFETY PROJECT SUPERVISOR, DAILY CREW ASSIGNMENT REPORTS SPECIFYING CREW AND CREW COMPOSITION AND WORK LOCATION.

7.0 SPECIAL CONSIDERATIONS

- 7.1 IN THE EVENT OF HIRING A CONTRATOR; DURING THE BIDDING PROCESS THE CONTRACTOR SHOULD CONSIDER THE FOLLOWING ITEMS:

- 7.1.1 ALL WASTE AND/OR ABANDONED MATERIALS TO BE REMOVED SHALL BE DISPOSED OF AT A “RECOGNIZED DUMP FACILITY” IN THE AREA AS DESIGNATED BY THE LOCAL GOVERNING AUTHORITY.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST
MARYSVILLE CA
95901

flock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HERBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION

CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET: GN.01	REV: 0
-----------------	-----------

LOCATION DATA

Sheet	Name	Latitude	Longitude	Nearest Address
A.01	#01 Rd 169 SB	39.39814706	-121.1491524	12460 County Rd 169, Dobbins, CA 95935, US
A.02	#02 Rd 169 @ Marysville Rd SB	39.39325692	-121.1466302	12571 Marysville Rd, North San Juan, CA 95960, US
A.03	#04 Hornswaggle Campground Outbound	39.41536232	-121.1208542	13440 Marysville Rd, Camptonville, CA 95922, US
A.04	#05 Dark Day Rd @ Marysville Rd SB	39.42264675	-121.1129745	CVFP+3R, North San Juan, CA undefined, US

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA
95901

frock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HEARBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER
MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER
UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION

CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET: GN.02	REV: 0
-----------------	-----------

1

PROPOSED FLOCK EQUIPMENT ON PROPOSED 12'-0" FLOCK POLE
#01 RD 169 SB COUNTY PERMITTING
39.39814705757905, -121.14915240740268
3'-11" FROM EDGE OF PAVEMENT
*REFERENCE TYPICAL DETAIL ON SHEET SPEC.01



[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY
1220 F ST MARYSVILLE CA
95901

flock safety
1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HEREBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER UNDER THE LAWS OF THE STATE OF CA.



[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION
CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS	
SHEET: A.01	REV: 0

PROPOSED FLOCK EQUIPMENT ON PROPOSED 12'-0" FLOCK POLE
#02 RD 169 @ MARYSVILLE RD SB
39.393256923589,-121.1466302033249
3' FROM EDGE OF PAVEMENT
*REFERENCE TYPICAL DETAIL ON SHEET SPEC.01

1

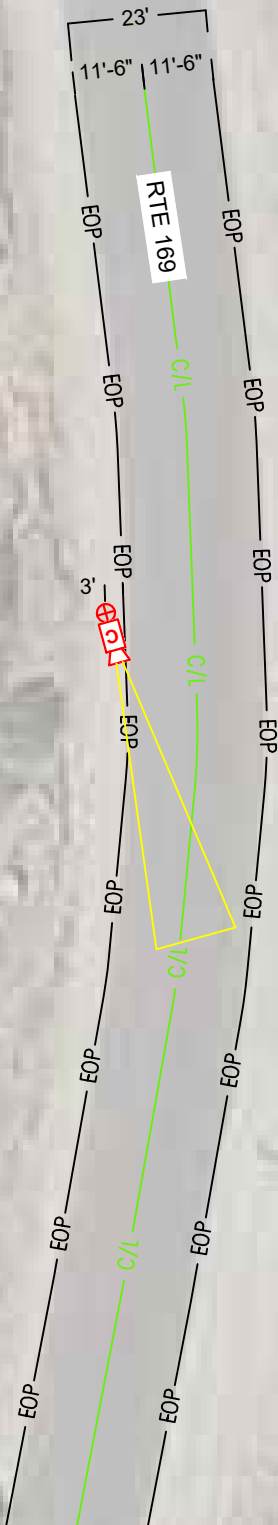

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA
95901

flock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HERBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER
MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER
UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION

CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET: A.02	REV: 0
----------------	-----------



[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA
95901

frock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HERBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER
MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER
UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION

CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET: A.03	REV: 0
----------------	-----------

1


PROPOSED FLOCK EQUIPMENT ON PROPOSED 12'-0" FLOCK POLE

#05 DARK DAY RD @ MARYSVILLE RD SB

39.422646749100416,-121.11297446626205

7'-4" FROM FOG LINE

*REFERENCE TYPICAL DETAIL ON SHEET SPEC.01



[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA
95901

flock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HERBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION

CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS	
SHEET: A.04	REV: 0

DESIGN NOTES

1. POLE AND FOUNDATIONS ARE DESIGNED IN ACCORDANCE WITH THE FOLLOWING CODES:

1.1. 2009/2012/2015/2018/2021 INTERNATIONAL BUILDING CODE

1.2. AASHTO LRFD SPECIFICATIONSFOR STRUCTURAL SUPPORT FOR HIGHWAY SIGNS, LUMIN, TRAFFIC SIGNALS, 2015 EDITION.
2. POLE ANALYSIS AND FOUNDATION DESIGN ARE BASED ON THE FOLLOWINGCRITERIA

2.1. DESIGN WIND SPEED (Vult)): (SEE SECTION 2.6)

2.2. RISK CATEGORY: II

2.3. EXPOSURE CATEGORY: C

2.4. TOPOGRAPHIC CATEGORY: 1

2.5. SEISMIC DESIGN CRITERIA:

2.5.1. SOIL SITE CLASS: D (ASSUMED)

2.5.2. SPECTRAL RESPONSE, Ss: 1.000g (MAXIMUM)

2.5.3. SPECTRAL RESPONSE, S1: 0.400G (MAXIMUM)

2.5.4. SEISMIC DESIGN CATEGORY: B

2.6. STRUCTURE BASE REACTIONS ARE CALCULATED AS FOLLOWS:

DESIGN WIND SPEED (MPH)	MOMENT (K-FT)	SHEAR (KIP)	AXIAL (KIP)
115	2.70	0.280	0.160
125	3.20	0.330	0.160
135 (MAX)	3.70	0.380	0.160

- 2.7. SHOULD ANY OF THE SITE-SPECIFIC PARAMETERS BE HIGHER THAN WHAT IS NOTED ABOVE, THE EOR SHALL BE CONTACTED TO PROVIDE A REVISED DESIGN.
3. FOUNDATIONS ARE DESIGNED BY OTHERS, FLOCK SAFETY SHALL PROVIDE THE CONTRACTOR WITH INSTALLATION SPECIFICATIONS AND GUIDELINES. CONTRACTOR IS RESPONSIBLE FOR VERIFYING SOIL CONDITIONS PRIOR TO INSTALLATION.


GENERAL & CONSTRUCTION NOTES

1. CONTRACTOR SHALL CONTACT DESIGNATED AGENCY TO LOCATE ALL UNDERGROUND UTILITIES PRIOR TO CONSTRUCTION.
2. CONTRACTOR SHALL APPLY AND OBTAIN AN APPROVED TRAFFIC CONTROL PLAN IN ACCORDANCE WITH MUTCD AND LOCAL JURISDICTION STANDARDS.
3. CONTRACTOR SHALL RESTORE ALL DISTURBED AREAS TO ORIGINAL SITE CONDITION TO THE SATISFACTION OF STATE DEPARTMENT OF TRANSPORTATION AND LOCAL JURISDICTION.
4. ALL WORK SHALL CONFORM TO APPLICABLE ELECTRICAL CODES EXCEPT WHEN STATE DEPARTMENT OF TRANSPORTATION OR LOCAL JURISDICTION STANDARDS SUPERSEDE.
5. ALL CONSTRUCTION SHALL BE IN ACCORDANCE WITH SPECIFICATIONS DEFINED BY THE STATE DEPARTMENT OF TRANSPORTATION OR LOCAL JURISDICTION, UNLESS SPECIFICALLY STATED OR SHOWN OTHERWISE HEREIN.

ADA COMPLIANCE NOTES

1. ALL SIDEWALK CONSTRUCTION SHALL BE IN ACCORDANCE WITH ADA TITLE II, STATE DEPARTMENT OF TRANSPORTATION, AND LOCAL JURISDICTION STANDARDS,
2. STATE DEPARTMENT OF TRANSPORTATION CURRENT EDITION STANDARDS SHALL BE USED FOR PEDESTRIAN CONTROL PLANS WHEN CLOSURE OF SIDEWALK IS REQUIRED FOR CONSTRUCTION.
3. MINIMUM CLEAR PEDESTRIAN ACCESS ROUTE (PAR) SHALL BE 48" WIDE.
4. NO OBSTRUCTION IS PERMITTED ALONG THE WIDTH OF THE SIDEWALK. UP TO AN ELEVATION OD 7'-0" ABOVE GRADE.

ITEM NO.	PART NUMBER	DESCRIPTION	TOTAL WEIGHT (LB)	QTY.
1	701-0059	FLOCK SAFETY CAMERA	3.6	1
2	201-00087	MOUNTING CLAMP	2.0	1
3	205-00010	60W SOLAR KIT	17.0	1
4	701-00111	EXTERNAL BATTERY PACK	6.0	2 (MAX)

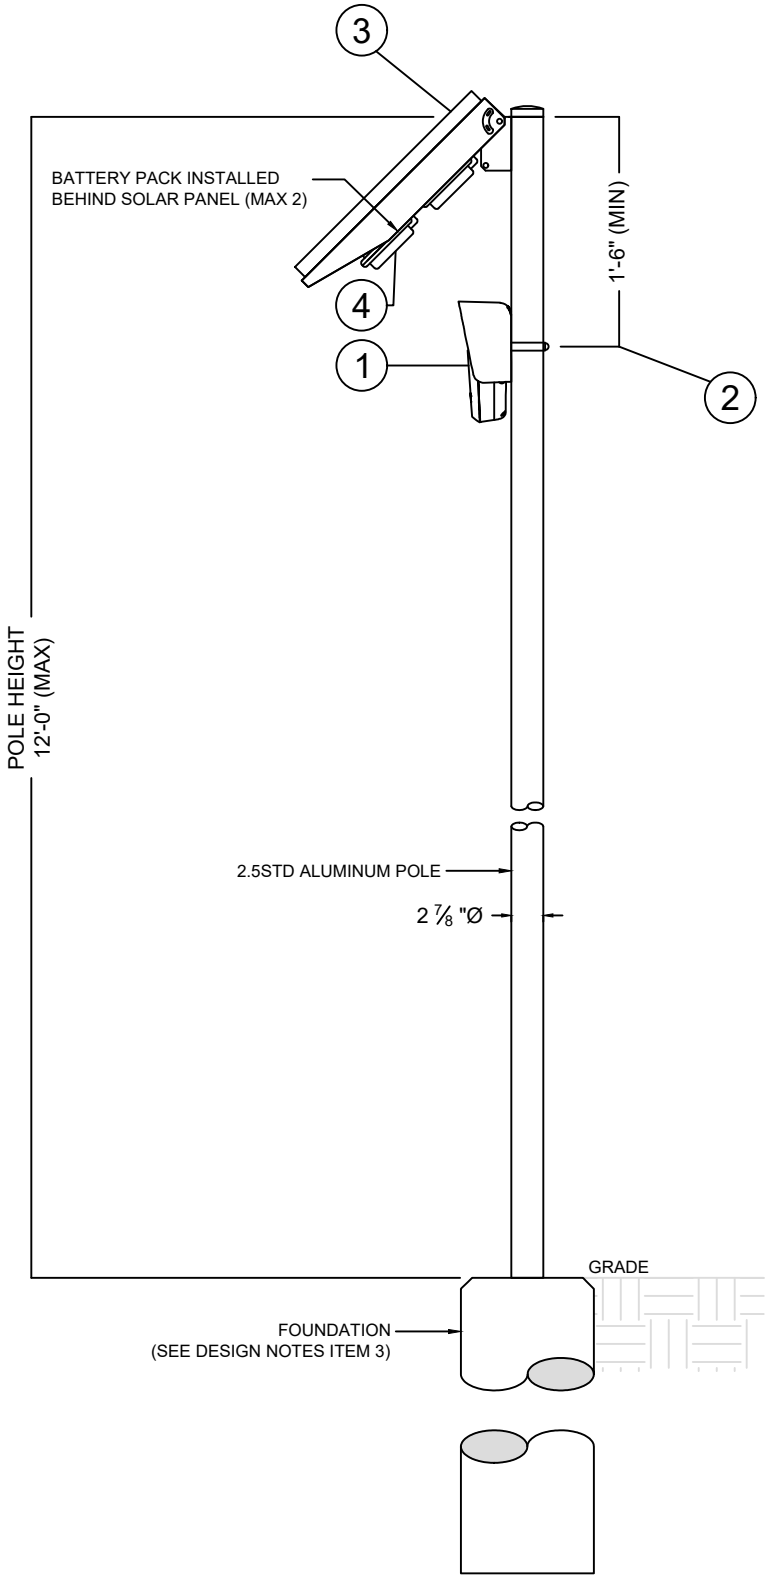

1 POLE ELEVATION DETAIL

SCALE: N/A

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA
95901

flock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HEARBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA
INSTALLATION


CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET:
SPEC.01


REV:
0

1

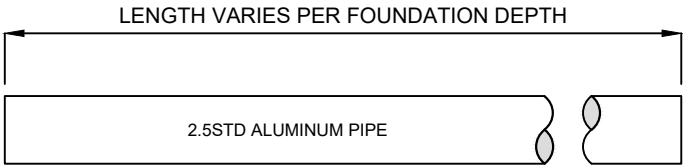


PIPE DETAIL


2

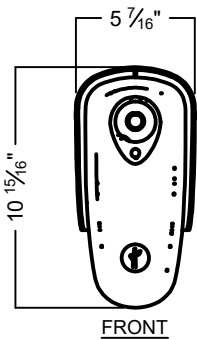

FRONT

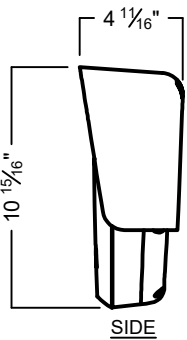

SIDE




ISOMETRIC


FLOCK SAFETY "FALCON" CAMERA

MOUNTING HARDWARE TO BE PROVIDED BY FLOCK SAFETY

3

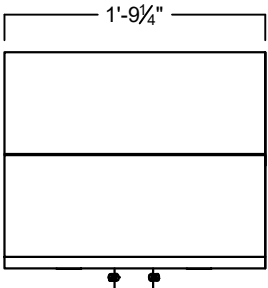


FRONT

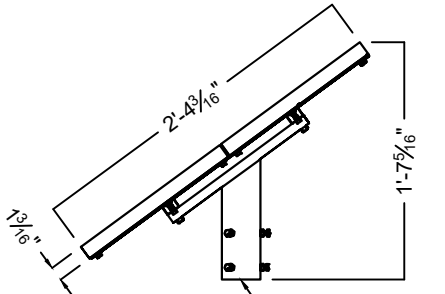

SIDE

PIPE SLEEVE MOUNT

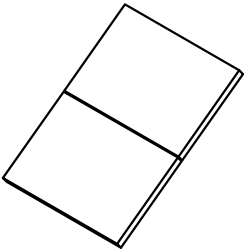


ISOMETRIC

60 WATT SOLAR PANEL DETAIL (TOP MOUNTED)

MOUNTING HARDWARE TO BE PROVIDED BY FLOCK SAFETY

4

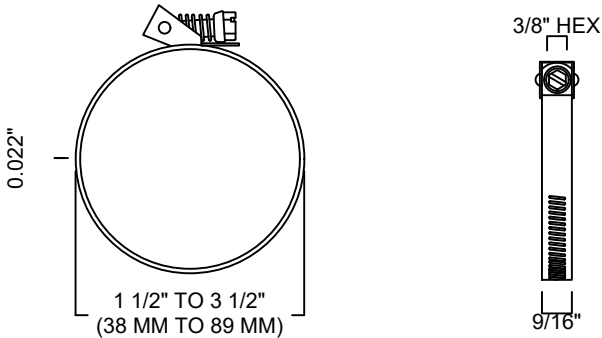


MCMASTER-CARR QUICK-RELEASE CLAMP FOR FIRM HOSE AND TUBE,
201 STAINLESS STEEL WITH 410 STAINLESS STEEL SCREW
PART NUMBER: 5322K58

MOUNTING CLAMP

MOUNTING HARDWARE TO BE PROVIDED BY FLOCK SAFETY

5

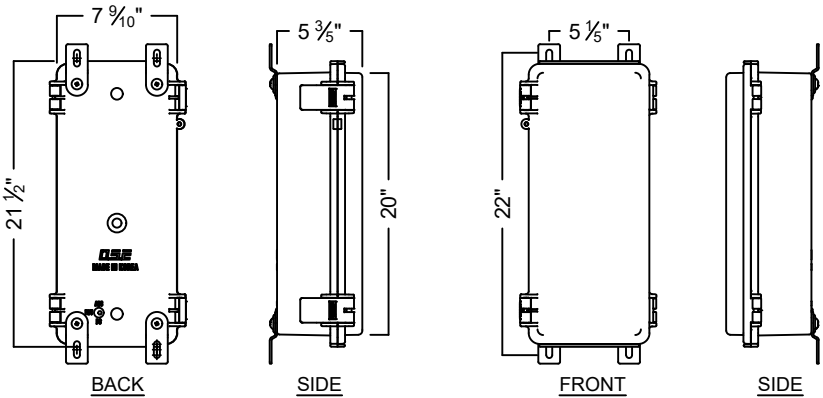

BACK

SIDE

FRONT

SIDE

EXTERNAL BATTERY PACK

MODEL 701-00111 SUPPLIED BY FLOCK SAFETY

MOUNTING HARDWARE TO BE PROVIDED BY FLOCK SAFETY

6 NOT USED

7 NOT USED

8 NOT USED

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA
95901

flock safety

1170 HOWELL MILL ROAD SUITE 210
ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HEARBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]


LICENSE PLATE READER CAMERA
INSTALLATION

CASE NUMBER: 00363949
PERMITTING JURISDICTION:
YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET:
SPEC.02

REV:
0

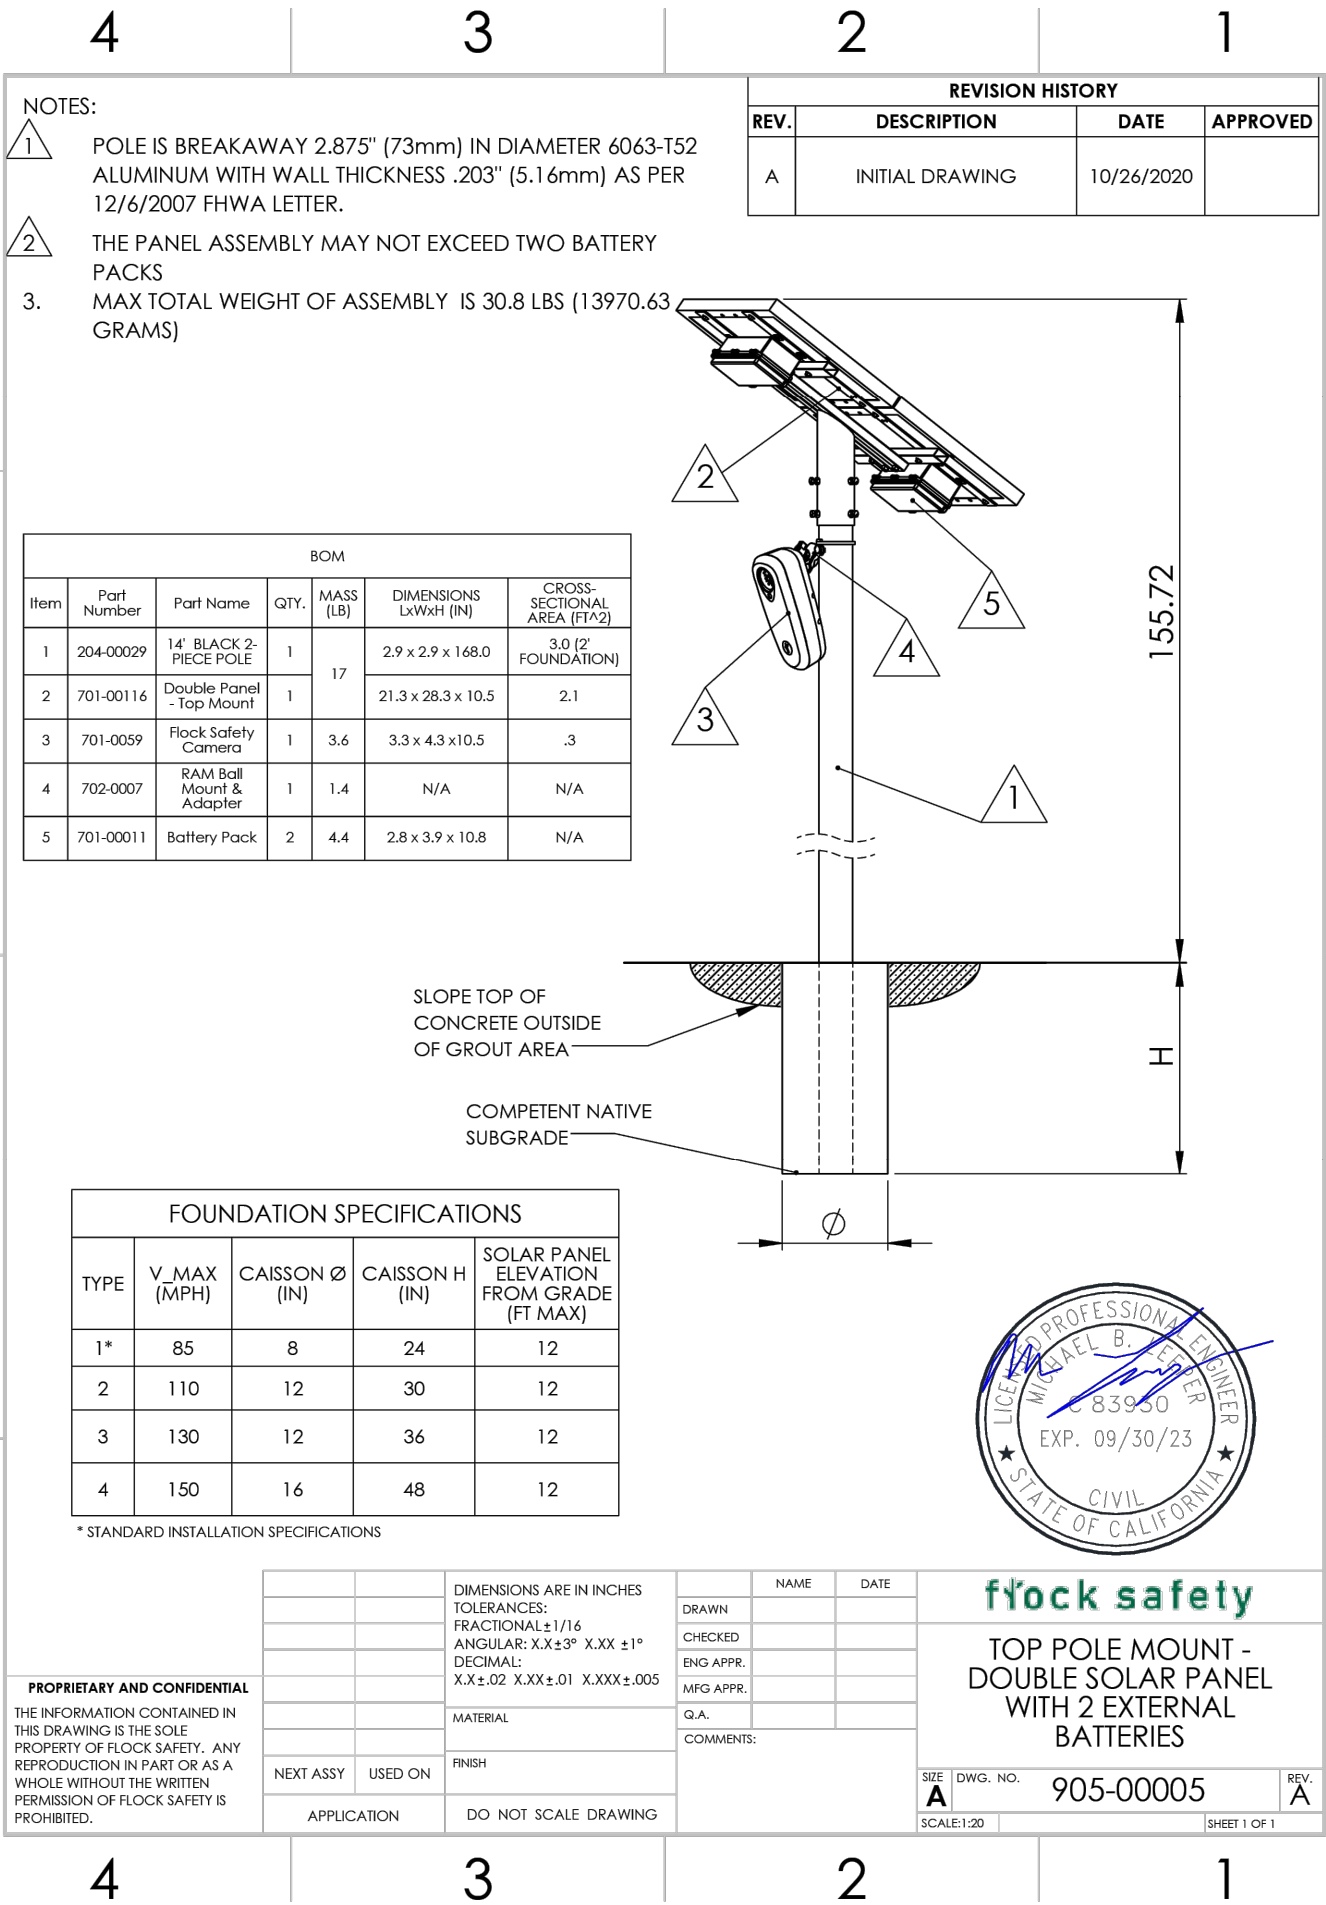

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

YUBA COUNTY WATER AGENCY

1220 F ST MARYSVILLE CA 95901

flock safety

1170 HOWELL MILL ROAD SUITE 210 ATLANTA, GA 30318

REV	DATE	BY	DESCRIPTION
-	-	-	-
-	-	-	-
-	-	-	-
-	-	-	-
0	06/08/23	KO	PRELIM

I HERBY CERTIFY THIS DOCUMENT WAS PREPARED BY MYSELF OR UNDER MY DIRECT SUPERVISION THAT I AM A DULY REGISTERED ENGINEER UNDER THE LAWS OF THE STATE OF CA.

[THIS SPACE LEFT INTENTIONALLY BLANK FOR STAMP]

LICENSE PLATE READER CAMERA INSTALLATION

CASE NUMBER: 00363949

PERMITTING JURISDICTION: YUBA COUNTY

COVER SHEET & LOCATION MAPS

SHEET: SPEC.03

REV: 0

YUBA COUNTY DEPARTMENT OF PUBLIC WORKS DRIVEWAY CONSTRUCTION & ENCROACHMENT PERMIT GENERAL PROVISIONS

1. AUTHORITY:

Each permit is issued in accordance with Chapter 5.5 of Division 2, commencing with Section 1450 et seq., of the Streets and Highways Code (SHC) and Yuba County Ordinance Code, Chapter 9.50 and 11.52.

2. REVOCATION:

Except as otherwise provided for public corporations, franchise holders, and utilities, permits are revocable on five (5) days notice. These General Provisions, Utility Maintenance Provisions, and any permit issued hereunder are revocable or subject to modification or abrogation at any time without prejudice, however, to prior rights, including those evidenced by joint use agreements, franchise rights, reserved rights, or any other agreements for operation purposed in the County highway right-of-way.

3. RESPONSIBLE PARTY:

No party other than the named permittee or their agent is authorized to work under any permit.

4. ACCEPTANCE OF PROVISIONS:

It is understood and agreed by the permittee that doing of any work under this permit shall constitute an acceptance of the provisions of this permit and all attachments.

5. NOTICE PRIOR TO STARTING WORK:

Before starting work under the permit, the permittee shall notify the designated department representative two (2) working days prior to initial start of work. When work has been interrupted for more than five (5) working days, an additional notification is required before restarting work unless a pre-arranged agreement has been made with the department's representative. Unless otherwise specified, all work shall be performed on weekdays and during normal working hours of the department's representative.

6. STANDARDS OF CONSTRUCTION:

All work performed within the highway shall conform to the latest edition of the Yuba County Improvement Standards and the current California Department of Transportation Standard Specifications and any Special Provisions relating thereto.

7. INSPECTION AND APPROVAL BY THE DEPARTMENT:

All work shall be subject to monitoring, inspection, and approval by the Department. The permittee shall request a final inspection and acceptance of the work.

8. KEEP PERMIT ON THE WORK SITE:

The permit or a copy thereof shall be kept at the site of the work and must be shown to any representative of the department or any law enforcement officer on demand. WORK SHALL BE SUSPENDED IF PERMIT IS NOT AT JOB SITE AS PROVIDED.

9. CONFLICTING PERMITS:

If a prior encroachment conflicts with the proposed work, the new permit tee must arrange for any necessary removal or relocation with the prior permit tee. Any such removal or relocation will be at no expense to the department.

10. PERMITS FROM OTHER AGENCIES:

The party or parties to whom a permit is issued shall, whenever required by law, secure the written authorization for any work that must be approved by the Public Utilities Commission (PUC) of the State of California, CAL-OSHA, or any other public agency having jurisdiction. Failure to comply with the law, as noted above, will invalidate the department's permit.

11. PROVISIONS FOR PEDESTRIANS:

Where facilities exist, a minimum sidewalk and bike path width of four feet (4) shall be maintained at all times for safe passage through the work area. At no time shall pedestrians be diverted onto a portion of the street used for vehicular traffic. At locations where adjacent alternate walkways cannot be provided, appropriate signs and barricades shall be installed at the limits of construction and in advance of closure at the nearest crosswalk or intersection to divert pedestrians across the street.

12. PROTECTION OF TRAFFIC:

Adequate provisions shall be made for the protection of the traveling public. Warning signs, lights and safety devices, shall conform to the requirements of the Manual of Traffic Controls issued by the California Department of Transportation. Traffic control for day or nighttime lane closures shall be in conformance with California Department of Transportation Standard Plans for Traffic Control Systems. Nothing in the permit is intended, as to third parties, to impose on permittee any duty, or standard of care, greater than or different than the duty or standard of care imposed by law.

13. MINIMUM INTERFERENCE WITH TRAFFIC:

All work shall be planned and carried out so that there will be the least possible inconvenience to the traveling public. The permittee is authorized to place properly attired flagger(s) to stop and warn conventional highway traffic. Traffic shall not be unreasonably delayed. Flagging procedures shall be in conformance with the Instructions to Flaggers pamphlet and/or Manual of Traffic Controls for Construction and Maintenance Work Zones issued by the Department. A traffic control plan shall be submitted to the County for comment.

14. STORAGE OF EQUIPMENT AND MATERIAL:

No material shall be stored within eight (8) feet of the edge of the pavement or traveled way or within the shoulder lines where the shoulders are wider than eight (8) feet. Utilities are subject to the provisions of Section 22512 of the California Vehicle Code (CVC).

15. CARE OF DRAINAGE:

If the work contemplated in any permit shall interfere with the established drainage, ample provision shall be made by the permittee to provide for it as may be directed by the department.

16. MAKING REPAIRS:

In every case, the permittee shall be responsible for restoring to its former condition as nearly as may be possible any portion of the County highway facility which has been excavated or otherwise disturbed by permittee. The permittee shall maintain the surface over facilities placed under any permit. If the highway is not restored as herein provided for, or if the department elects to make repairs, permittee agrees by acceptance of permit to bear the cost thereof.

17. CLEAN UP RIGHT-OF-WAY:

Jobsite and right of way shall be kept clean at all times. Upon completion of the work all brush, timber, scraps, material, etc., shall be entirely removed and the County right-of-way shall be left in as presentable a condition as existed before work started.

18. COST OF WORK:

Unless otherwise stated on the permit or other separate written agreement, all cost incurred for work within the County right-of-way pursuant to this permit shall be borne by the permittee, and permittee hereby waives all claims for indemnification or contribution from the County for such work.

19. ACTUAL COST BILLING:

When the permittee is to be billed actual costs (as indicated on the face of the permit), such costs will be at the current hourly rate established by the department for permits.

20. SUBMIT PLAN:

For installation of all underground facilities, and all surface work or other activity of consequence, the permittee shall furnish two (2) sets of plans showing location and construction of other activity with its application. Prior to acceptance of the work, one (1) set of as-built plans shall be submitted to the Department of Public Works.

21. BONDING:

This permit shall not be effective for any purpose unless, and until the permittee files with the department a surety bond when required by the department in the form and amount required by the department. A bond is not ordinarily required of any public corporation or publicly or privately-owned utility but will be required of any utility that fails to meet any obligation arising out of the work permitted or done under a permit or fails to maintain its plant, work, or facilities. The said bond shall remain in force for a period of one (1) year after acceptance of the work by the department.

22. MAINTENANCE OF HIGHWAYS:

The permittee agrees, by acceptance of a permit, to properly maintain any encroachment. This will require inspection and repair of any damage to County facilities resulting from the encroachment.

23. RESPONSIBILITY FOR DAMAGE:

The County of Yuba and all officers and employees thereof, including but not limited to the Director of Public Works and the Deputy Director, shall not be answerable or accountable in any manner for injury to or death of any person, including but not limited to the permittee, persons employed by the permittee, persons acting in behalf of the permittee, or for damage to property from any cause. The permittee shall be responsible for any liability imposed by law and for injuries to or death of any person, including but not limited to the permittee, persons employed by the permittee, persons acting in behalf of the permittee, or damage to property arising out of work, or other activity permitted and done by the permittee under a permit, or arising out of the failure on the permittee's part to perform his obligations under any permit in respect to maintenance or any other obligations, or from any cause whatsoever during the progress of the work, or other activity, or at any subsequent time work or other activity is being performed under the obligations provided by and contemplated by the permit. The permittee shall indemnify and save harmless the County and all officers and employees thereof, including but not limited to the Director of Public Works and the Deputy Director, from all claims, suits or actions of every name, kind and description brought for or on account of injuries to or death of any person, including but not limited to the permittee, persons employed by the permittee, persons acting in behalf of the permittee and the public, or damage to property resulting from the performance of work or other activity under the permit, or arising out of the failure on the permittee's part to perform his obligations under any permit in respect to maintenance or any other obligations, or resulting from defects or obstructions, or from any cause whatsoever during the progress of the work, or other activity or at any subsequent time work or other activity is being performed under the obligations provided by and contemplated by the permit, except as otherwise provided by statute. The duty of the permittee to indemnify and save harmless includes the duties to defend as set forth in Section 2778 of the Civil Code. The permittee waives any and all rights to any type of expressed or implied indemnify against the County its officers or employees. It is the intent of the parties that the permittee will indemnify and hold harmless the County its officers and employees from any and all claims, suits or actions as set forth above regardless of the existence or degree of fault or negligence, whether active or passive, primary or secondary, on the part of the County the permittee, persons employed by the permittee, or persons acting in behalf of the permittee.

24. NO PRECEDENT ESTABLISHED:

This permit is issued with the understanding that any particular action is not to be

considered as establishing any precedent (1) on the question of the expediency of permitting any certain kind of encroachment to be erected within right-of-way of County highways, or (2) as to any utility of the acceptability of any such permits as to any other or future situation.

25. ARCHAEOLOGICAL:

The permittee shall cease work in the vicinity of any archaeological resources that are revealed. The Permit Engineer shall be notified immediately. A qualified archaeologist, retained by the permittee, will evaluate the situation and make recommendations to the Permit Engineer concerning the continuation of the work.

26. FUTURE MOVING OF INSTALLATIONS:

If the Encroachment Permit was issued at the request of the permittee, it is understood that whenever County construction, reconstruction or maintenance work on the highway requires the installation to be moved, adjusted or relocated, the permittee, at his sole expense, upon request of the department, shall comply with said request.

27. RIGHT OF ENTRY:

By signing the Permit Application, the applicant agrees to allow County Personnel right of entry to the property to inspect project site.

28. DEVIATIONS:

The permittee shall notify the department in writing of any proposed deviations or changes in the work to be done under any permit and shall not proceed therewith until he has obtained both the written consent of the department, and the written, signed and acknowledged consent to such deviation or change of any surety company whose bond or bonds are posted in connection with such work.

29. CHANGES ON PERMITS:

Any permit issued hereunder shall be subject to such conditions, changes or limitations as are from time to time deemed necessary by the department for the protection of the highways or to prevent undue interference with the traffic or to protect both persons and property within, upon or adjacent to the highways from damage or danger. In the case of changes or limitations or conditions to be made or imposed by the department after a permit is issued hereunder, the department shall notify the permittee thereof, in writing, either by mail to the address set forth on the application or by personal service upon the permittee. Such change in new limitation or condition shall be effective twenty-four (24) hours after deposit in the United States mail or immediately upon personal service.

30. PRESERVATION OF MONUMENTS:

Any monument set for the purpose of locating or preserving the lines of any road or property subdivisions, or a precise survey reference point, or a permanent survey bench mark within the county shall not be removed or disturbed or caused to be removed or disturbed without first obtaining permission in writing from the department to do so. Before monuments, reference points and bench marks are disturbed, or removed, they shall be tied out by a licensed surveyor or registered civil

engineer or under the directions of same. After completion of the work, the monuments, reference points and bench marks shall be accurately reset at the expense of permittee.

31. PROTECTION OF ADJOINING PROPERTY:

The permittee shall at all times and at his own expense preserve and protect from injury any adjoining property by providing proper foundations and taking other measures suitable for the purpose. Where in the protection of such property it is necessary to enter upon private property for the purpose of taking appropriate protective measures the permittee shall first attempt to obtain a license from the owner of such private property for such purposes. The permittee shall, at his own expense, shore up and protect all buildings, walls, fences or other property likely to be damaged during the progress of the excavation work and shall be responsible for all damage to any roads or other public or private property, real and personal, resulting from his failure properly to protect and carry out such work subject to the foregoing provisions relating to entry upon private property. Whenever it is necessary to trench through any lawn area, the permittee shall carefully cut the sod and upon completion of the work shall replace it or reseed the area if cutting a replacing sod is impractical. All construction and maintenance work shall be done in a manner calculated to leave the lawn area clean of earth and debris and in a condition as close as possible to that which existed before such work began. The permittee shall not remove, even temporarily, any trees, or shrubs which exist in parking strip areas without first obtaining the consent of the department or other county officials having control of such property.

32. SAVE HARMLESS AGREEMENT:

The permittee agrees to save and hold harmless the County and each and every officer and employee thereof from any liability or responsibility for any accident, loss or damage to persons or property arising out of or connected in any way with any work done by the permittee under any permit granted hereunder.

33. DISCLAIMER OF LIABILITY:

These provisions shall not be construed as imposing upon the County or any official or employee any liability or responsibility for damages to any person injured by the performance of any work for which the permit is issued hereunder, nor shall the County or any official or employee thereof be deemed to have assumed any such liability or responsibility by reason of inspections authorized hereunder, the issuance of any permit or the approval of any work permitted hereunder.